

Dry-Glide® 3H Silicone Release

PRODUCT DESCRIPTION:

JAX Dry-Glide® 3H Silicone Release is clear, water-white dimethylpolysiloxane fluid used for food-grade applications. It is NSF H1 and 3H compliant so it can be used both as an incidental contact lubricant and as a release agent. This 100% silicone fluid is manufactured under rigidly controlled conditions to ensure the highest quality and purity of product.

PRODUCT FEATURES:

- Effective Release Agent
- Reduces Abrasion and Sticking
- Kosher and Pareve Certified
- Allergen-Free
- Good Heat Stability
- Low Environmental Hazard
- Low Toxicity
- High Dielectric Strength
- High Oxidation Resistance
- High Compatibility
- High Water Repellency
- Non-Greasy
- Low Odor
- Low Reactivity

APPLICATIONS:

- Mold Release Agent
- Elastomer and Plastics Lubricant
- Electrical Insulating Fluid
- Foam Preventative or Breaker
- Surface Active Agent
- Friction Reducer

BENEFITS:

- NonBioaccumulating
- Nonbioactive
- Nongreasy
- Nonocclusive
- Tasteless
- Non Rancidifying

TECHNICAL DATA:

Propellant:	Propane and Butane
Flash Point:	620°F (326°C) Silicone Fluid, typical -94°F (-70°C) Propellant, typical
Pour Point:	-85°F (-65°C) Silicone Fluid, typical
Spray Pattern:	Very Fine Mist
Viscosity:	266 cSt @ 40°C Silicone Fluid
Texture:	Evaporating Mist
Appearance:	Clear
Consistency:	Light
Specific Gravity:	0.977 for Concentrate, typical

AEROSOL PACKAGING:


11.5 oz. net weight aerosol cans (12/case) – Part # JAX308

BULK PACKAGING:

See JAX Silicone 350 Fluid



Dry-Glide® 3H Silicone Release

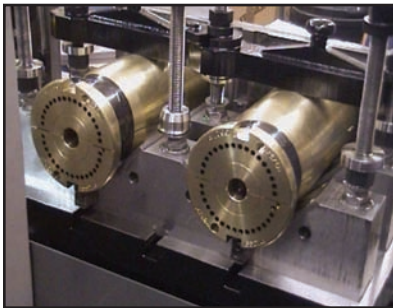

NSF International / Nonfood Compounds Registration Program

Nonfood Compounds
Program Listed

December 9, 2013

Ms. Patty Riek
Pressure-Lube, Inc. Jax
W134 N5373 Campbell Drive
Menomonee Falls, WI 53051
United States

RE: JAX DRY-GLIDE 3H SILICONE RELEASE (AEROSOL)
Category Code: 3H
NSF Registration No. 148898

Dear Ms. Patty Riek:

NSF has processed the application for Registration of **JAX DRY-GLIDE 3H SILICONE RELEASE (AEROSOL)** to the NSF International Registration Guidelines for Proprietary Substances and Nonfood Compounds (2009), which are available at www.nsfwhitebook.org. The NSF Nonfood Compounds Registration Program is a continuation of the USDA product approval and listing program, which is based on meeting regulatory requirements including FDA 21 CFR for appropriate use, ingredient and labeling review.

This product is acceptable for use as a Release Agent (3H) on grills, ovens, loaf pans, boning benches, chopping boards, or other hard surfaces in contact with meat and poultry food products to prevent food from adhering during processing.

NSF Registration of this product is current when the NSF Registration Number, Category Code, and Registration Mark appear on the NSF-approved product label, and the Registered product name is included in the current NSF White Book Listing of Nonfood Compounds at the NSF website (www.nsfwhitebook.org).

NSF Listing of all Registered Nonfood compounds by NSF International is not an endorsement of those compounds, or of any performance or efficacy claims made by the manufacturer.

Registration status may be verified at any time via the NSF website, at www.nsfwhitebook.org. Changes in formulation or label, without the prior written consent of NSF, will void Registration, and will supersede the on-line listing.

Sincerely,

Amanda Phelka
NSF Nonfood Compounds Registration Program

Company No: N05625

Distributed By:

PRESSURE-LUBE
America's Finest Lubricants