



- the original since 1922 -

TS483LX Pneumatic Caulking Gun

Features:


AntiDrip
Well Balanced Handle
One Hand Pressure Adjustment
Air Operated Return of Rod
Quick reloading



Original Design & Manufacturing

Use:

Cartridge: Dual (2-Component)
 Volume: 2 x 200ml
 Viscosity: Medium
 (Polyurethane)

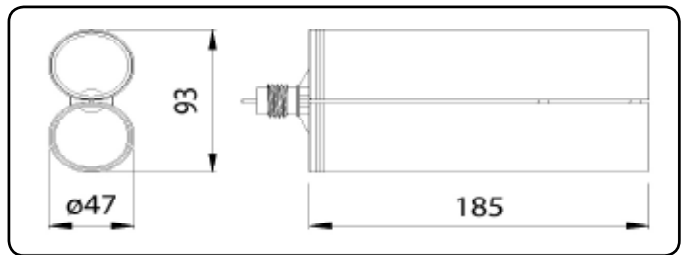

Web - Links: [Technical drawing \(PDF\)](#)
[Maintenance](#)

Description:

Professional
 Reinforced Nylon Handle
 Metal Cartridge Holder
 Aluminium Air Cylinder

Technical data:

Weight: 1.92 kg
 Length: 47.5 cm
 Force: 2.7 kN ~270 kg
 Air Supply: 8 bar (116 PSI)
 Air Consumption: max 40 litres/min.

Variations:

Standard colour: Red/Black

Packaging:

Packed individually

For customized versions please contact us

Krøger A/S - Geminivej 4-6 - DK-2670 Greve - Denmark - Phone: +45 43600111 - Fax: +45 43690137
 www.mk-guns.dk - mail@mk-guns.dk

