


Proportional directional valve

- not pressure compensated
- $Q_{max} = 20 \text{ l/min}$
- $Q_{Nmax} = 12 \text{ l/min}$
- $p_{max} = 350 \text{ bar}$

NG4
 ISO 4401-02

DESCRIPTION

Direct operated proportional spool valve in flange design NG4 to ISO 4401-02 with 4 ports. The spool valve is designed to the 5 chamber principle. The volume flow is adjusted by a slip-on coil acc. to VDE 0580. Low pressure drop due to the body design and spool profiling. The spool is made of hardened steel. The body made of high grade hydraulic casting for long service life is painted. The armature tube and the plug crew are zinc coated. The solenoid coil is zinc-/nickel-coated.

FUNCTION

Proportionally to the solenoid current spool stroke, spool opening and valve volume flow will increase. Proportional directional valves NG4 ISO 4401-02 are not load-compensated. The optimum spool shape and progressive characteristics curve allow fine motion control. To control the valve Wandfluh proportional amplifiers are available (see register 1.13).

APPLICATION

Proportional directional spool valves are well suited for demanding applications where high resolution, high volume flow and low hysteresis are requested. They are implemented in industrial hydraulics as well as in mobile hydraulics for the smooth control of hydraulic actuators. Application examples: pitch control of wind generators, forest and earth moving machines, machine tools and paper production machines with simple position controls, robotics and fan control.

TYPE CODE

		W D P F B04 - [] - [] - [] - [] / [] [] - [] - [] # []																		
Proportional directional valve																				
Flange construction																				
International standard interface ISO, nominal size 4																				
Description of symbols acc. to table 1.10-74/2																				
Nominal volume flow Q_N	4 l/min																			
	8 l/min																			
	12 l/min																			
Standard nominal voltage U_N	12 VDC																			
	24 VDC																			
	without solenoid coil																			
Slip-on coil	Metal housing round with one-sided collar																			
	Metal housing square with one-sided collar																			
Electric connection	Connector socket EN 175301-803 / ISO 4400																			
	Connector socket AMP Junior-Timer																			
	Connector Deutsch DT04-2P																			
Sealing material	NBR																			
	FKM (Viton)																			
Manual override	Integrated																			
	Push-button																			
	Spindle																			
Design-Index (Subject to change)																				

* Only available in conjunction with other nominal voltages and connection versions. (See data sheet 1.1-175)

GENERAL SPECIFICATIONS

Nominal size	NG4 to ISO 4401-02	Ambient temperature	-20...+70 °C (slip-on coil «V») if > +50 °C, then $I_G - 10\%$
Designation	Direct operated proportional spool valve		
Construction	Direct operated spool valve		
Betätigungsart	Proportional solenoid	Mounting position	any, preferably horizontal
Mounting	Flange, 4 fixing holes for socket head cap screws M5x40	Fastening torque	$M_D = 5,5 \text{ Nm}$ (screw quality 8.8) for fixing screws $M_D = 5 \text{ Nm}$ for knurled nut
Connections	Connection plates Multi-station flange subplate Longitudinal stacking system		

ELECTRICAL SPECIFICATIONS

Construction	Proportional solenoid, wet pin push type, pressure tight	
Standard-Nominal voltage	$U_N = 12$ VDC	$U_N = 24$ VDC
Limiting current	$I_G = 1200$ mA	$I_G = 630$ mA
Relative duty factor	100% DF (see data sheet 1.1-430)	
Protection class to EN 60529	Connection version D: IP 65 J: IP 66 G: IP 67 and 69K	
Connection/Power supply	Over device plug connection	
Other electrical specifications see data sheet	1.1-168 (V) 1.1-175 (N)	

HYDRAULIC SPECIFICATIONS













Fluid	Mineral oil, other fluid on request
Contamination efficiency	ISO 4406:1999, class 18/16/13 (Required filtration grade $\beta_{6...10} \geq 75$) refer to data sheet 1.0-50/2
Viscosity range	12 mm ² /s...320 mm ² /s
Fluid temperature	-20...+70°C
Working pressure in port P, A, B	$p_{max} = 350$ bar
Tank pressure in port T	$p_{Tmax} = 160$ bar
Nominal volume flow	$Q_N = 4$ l/min, 8 l/min, 12 l/min
Max. volume flow	see characteristic
Leakage volume flow	on request
Hysteresis	$\leq 5\%$ * * at optimal dither signal

MANUAL OVERRIDE

- Integrated (-) Actuation pin integrated in the armature tube.
- Push-button (HF1) integrated in the knurled nut. Actuation by pressing the pin
- Spindle (HS1) integrated in the knurled nut. Actuation by turning the spindle (infinitely variable valve actuation)


Weight	
4/3-way	m = 1,25 kg
4/2-way (1 solenoid)	m = 0,9 kg

TYPE CHARTS / DESIGNATIONS OF SYMBOLS


	ACB - S S = Symmetrical control mode		ACB - V V = Meter-in control mode
	AC1 - S S = Symmetrical control mode		AC1 - V V = Meter-in control mode
	CB2 - S S = Symmetrical control mode		CB2 - V V = Meter-in control mode
	ACB - R R = Meter-out control mode		ADB - V V = Meter-in control mode
	AC1 - R R = Meter-out control mode		AD1 - V V = Meter-in control mode
	CB2 - R R = Meter-out control mode		DB2 - V V = Meter-in control mode

CHARACTERISTICS oil viscosity $\nu = 30 \text{ mm}^2/\text{s}$

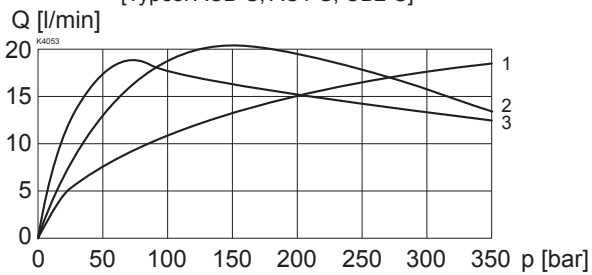
$Q = f(p)$ Volume flow pressure characteristics ($l = l_0$)
 [Types: ACB-S, AC1-S, CB2-S]



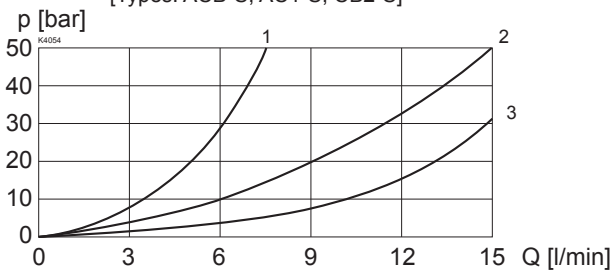
$\Delta p = f(Q)$ Pressure loss/flow characteristics ($l = l_0$)
 [Types: ACB-S, AC1-S, CB2-S]



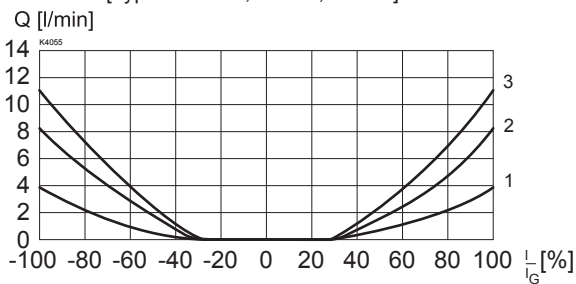
$Q = f(l)$ Volume flow adjustment characteristics ($\Delta p = 10 \text{ bar}$)
 [Types: ACB-S, AC1-S, CB2-S]



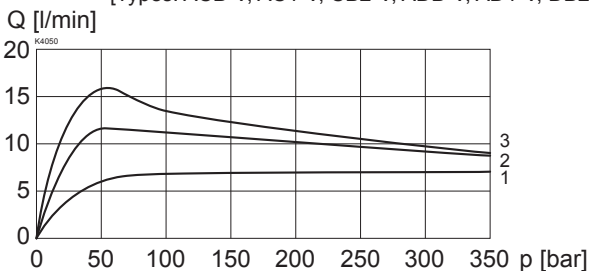
$Q = f(p)$ Volume flow pressure characteristics ($l = l_0$)
 [Types: ACB-V, AC1-V, CB2-V, ADB-V, AD1-V, DB2-V]



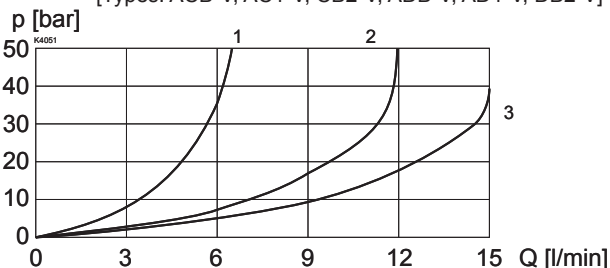
$\Delta p = f(Q)$ Pressure loss/flow characteristics ($l = l_0$)
 [Types: ACB-V, AC1-V, CB2-V, ADB-V, AD1-V, DB2-V]



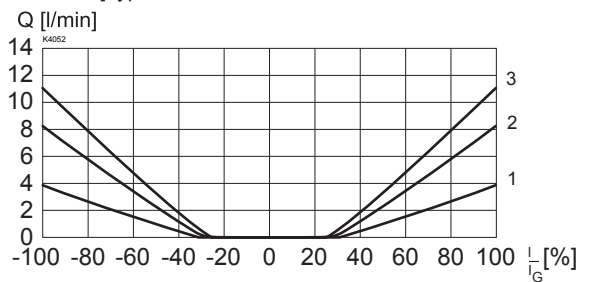
$Q = f(l)$ Volume flow adjustment characteristics ($\Delta p = 10 \text{ bar}$)
 [Types: ACB-V, AC1-V, CB2-V, ADB-V, AD1-V, DB2-V]



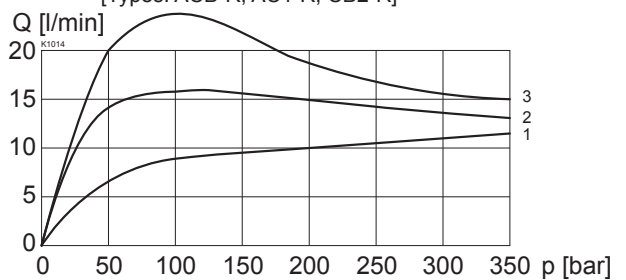
$Q = f(p)$ Volume flow pressure characteristics ($l = l_0$)
 [Types: ACB-R, AC1-R, CB2-R]



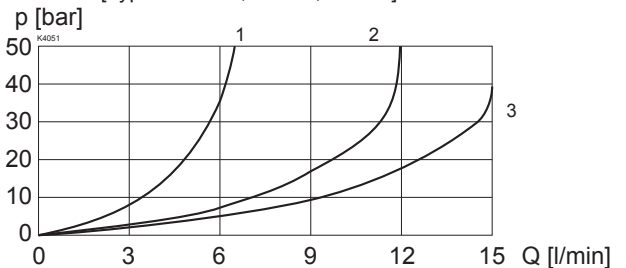$\Delta p = f(Q)$ Pressure loss/flow characteristics ($l = l_0$)
 [Types: ACB-R, AC1-R, CB2-R]



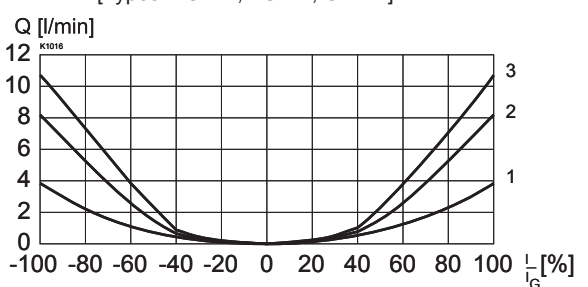$Q = f(l)$ Volume flow adjustment characteristics ($\Delta p = 10 \text{ bar}$)
 [Types: ACB-R, AC1-R, CB2-R]


Legend:

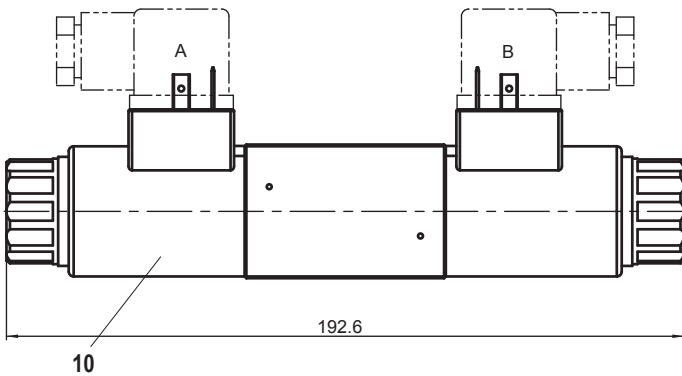
- 1: $Q_N = 4 \text{ l/min}$
- 2: $Q_N = 8 \text{ l/min}$
- 3: $Q_N = 12 \text{ l/min}$


NOTE!


All values measured over 2 metering edges, A and B ports linked.

DIMENSIONS


4/3-way valve





4/2-way valve

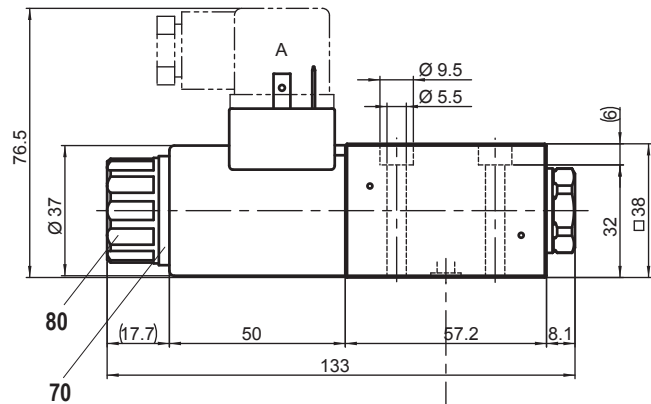

Push-button



Spindle

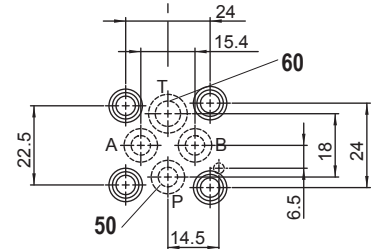
PARTS LIST

Position	Article	Description
10	206.2...	V.E37/19x50
50	160.2060 160.6061	O-ring ID 6,07x1,78 (NBR) O-ring ID 6,07x1,78 (FKM)
60	160.2076 160.6076	O-ring ID 7,65x1,78 (NBR) O-ring ID 7,65x1,78 (FKM)
70	160.2187 160.6187	O-ring ID 18,72x2,62 (NBR) O-ring ID 18,72x2,62 (FKM)
80	154.2700	Knurled nut
90	253.7001	Push-button
100	253.7000	Spindle

ACCESSORIES

 Threaded connecting plates, Multi-flange subplates
 and Longitudinal stacking system

see Reg. 2.9

Proportional amplifier

see Reg. 1.13

Mating connector (A) EN175301-803

article Nr. 219.2001

Mating connector (B) EN 175301-803

article Nr. 219.2002

Technical explanation see data sheet 1.0-100